








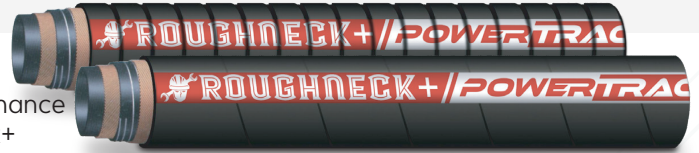

ROUGHNECK+

TANK TRUCK HOSE

Roughneck+ is Powertrack's 300# Tank Truck Suction Discharge Hose, an upgraded version of our 150# Roughneck hose. Designed for the same reliable performance in petroleum and oil applications, Roughneck+ offers an increased pressure rating of 300#, providing enhanced strength and durability. With its exceptional quality and upgraded capabilities, Roughneck+ is the ideal choice for demanding tank truck and oilfield operations that require higher pressure. Trust Roughneck+ to deliver superior performance and peace of mind.



- ▶ **TUBE:** *Black Nitrile synthetic rubber RMA class A (High Oil Resistance)*
- ▶ **REINFORCEMENT:** *Spiral-plyed synthetic fabric with dual helix wire*
- ▶ **COVER:** *Black (or Red) abrasion, oil, weather & ozone resistant rubber (Corrugated cover)*
- ▶ **TEMPERATURE:** *-20°F to +180°F*

Part Number	 I.D. (inch)	 O.D. (inch)	 Working Pressure (PSI)	 Standard Length (feet)	 Bend Radius (inch)	 Lbs./Ft.
AH-1-TT-300	1.00"	1.50"	300 PSI	200'	6"	0.65 Lbs/Ft
AH-1.25-TT-300	1.25"	1.77"	300 PSI	200'	8"	0.81 Lbs/Ft
AH-1.50-TT-300	1.50"	2.01"	300 PSI	200'	12"	0.94 Lbs/Ft
AH-1.77-TT-300	1.77"	2.36"	300 PSI	200'	14"	1.40 Lbs/Ft
AH-2-TT-300	2.00"	2.64"	300 PSI	200'	16"	1.67 Lbs/Ft
AH-2.50-TT-300	2.50"	3.07"	300 PSI	200'	18"	1.85 Lbs/Ft
AH-3-TT-300	3.00"	3.70"	300 PSI	200'	20"	2.45 Lbs/Ft
AH-3.50-TT-300	3.50"	4.29"	300 PSI	200'	24"	3.23 Lbs/Ft
AH-4-TT-300	4.00"	4.88"	300 PSI	200'	28"	4.25 Lbs/Ft
AH-4.50-TT-300	4.50"	5.35"	300 PSI	200'	33"	4.70 Lbs/Ft
AH-5-TT-300	5.00"	5.94"	300 PSI	200'	39"	5.60 Lbs/Ft
AH-6-TT-300	6.00"	7.13"	300 PSI	100'	47"	8.00 Lbs/Ft
AH-8-TT-300	8.00"	9.33"	300 PSI	100'	63"	12.34 Lbs/Ft
AH-10-TT-300	10.00"	11.57"	300 PSI	40'	79"	19.84 Lbs/Ft
AH-12-TT-300	12.00"	13.90"	300 PSI	40'	94"	28.39 Lbs/Ft
AH-14-TT-300	14.00"	16.14"	300 PSI	40'	110"	38.33 Lbs/Ft