






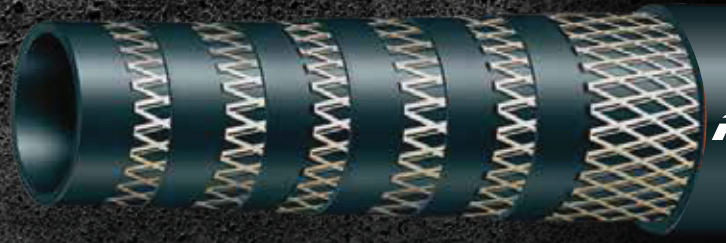


COBRA TEXTILE REINFORCED CONCRETE HOSE

Austin Hose's Cobra Textile Reinforced Concrete Hose is constructed using a smooth, highly abrasion-resistant tube and high-tensile textile cord reinforcements. The cover is smooth, abrasion and weather-resistant rubber. The recommended temperature range is -30°F to +180°F.



PART NUMBER	 I.D. (INCH)	 O.D. (INCH)	 WORKING PRESSURE (PSI)	 BURST PRESSURE (PSI)	 PLYS OF REIN.	 BEND RADIUS (INCH)	 LBS./FT.
AH-2-COBRA	2"	2.8"	1233	2466	4	20"	1.41
AH-2.5-COBRA	2-1/2"	3.3"	1233	2466	6	25"	2.04
AH-3-COBRA	3"	4.0"	1233	2466	6	30"	2.75
AH-3.5-COBRA	3-1/2"	4.6"	1233	2466	6	35"	3.47
AH-4-COBRA	4"	5.1"	1233	2466	6	40"	3.98
AH-4.5-COBRA	4-1/2"	5.6"	1233	2466	6	45"	4.50
AH-5-COBRA	5"	6.1"	1233	2466	6	50"	5.20

MULTIPLE END COMBINATIONS AVAILABLE



SHOP NOW

