

POWER-FRAC+

SPEC SHEET


- ▶ 2"x20'
- ▶ 3" 1502 MxF
- ▶ Crimped w/One Piece Forged 4130
- ▶ ID: 2" Non-Full Bore
- ▶ Working Pressure: 15,000psi
- ▶ Burst Tested: 30,000psi
- ▶ 6-Layer Steel Wire
- ▶ UPE/UHMW
- ▶ Max Volume: 10.5BPM
- ▶ Weight of Hose: 261lbs
- ▶ MBR: 5.2'

Estimated Chemical Resistance of UHMW and HNBR Base

RATING SCALE: 1. Recommended - Little to minor effect
 2. Minor to moderate effect
 X. Not recommended

	UHMW	HNBR	NBR	EPDM	CR	CSM	FKM	ACM
Steam 302° F(150° C)	-	2	-	1	-	-	X	-
ORGANIC ACID								
Acetic Acid (30%)	1	2	2	1	1	1	1	-
ACID								
Hydrochloric Acid (25%)	1	1	2	1	2	1	1	-
Phosphoric Acid (20%)	1	1	2	1	2	1	1	-
Nitric Acid (25%)	1	2	-	2	1	1	X	-
ALKALI								
Sodium Hydroxide (30%)	2	1	2	1	1	1	1	1
Aqueous Ammonia (28%)	2	1	1	1	1	1	1	2
SALT								
Sodium Chloride (30%)	1	1	1	1	1	1	1	1
Sodium Carbonate (10%)	1	1	1	1	1	1	1	2
OXIDIZING AGENT								
Hydrogen Peroxide (3%)	1	2	X	2	X	1	1	1
Sodium Hypochlorite (5%)	1	2	-	2	-	2	1	-
ALIPHATIC HYDROCARBON								
Iso Octane	1	1	1	-	2	2	1	1
AROMATIC HYDROCARBON								
Toluene	2	X	X	-	-	-	1	-
CHLORINATED HYDROCARBON								
Trichlorethylene	2	X	X	-	-	-	1	-
ALCOHOL								
Methyl Alcohol	1	1	1	1	1	1	X	-
Ethyl Alcohol	1	1	1	1	1	1	1	-
ETHER								
Ethyl Ether	1	X	X	X	-	-	-	-
ESTER								
Ethyl Acetate	1	-	-	2	X	X	X	-
KETONE								
Methyl Ethyl Keton	1	-	-	1	-	-	-	-
ALDEHYDE								
Furfural	1	2	X	1	2	2	-	-
AMINE								
Triethanolamine	1	1	X	1	1	1	-	-
Carbon Disulfide	1	X	X	-	-	-	1	-

POWER-FRAC+ Hose Cross-Section

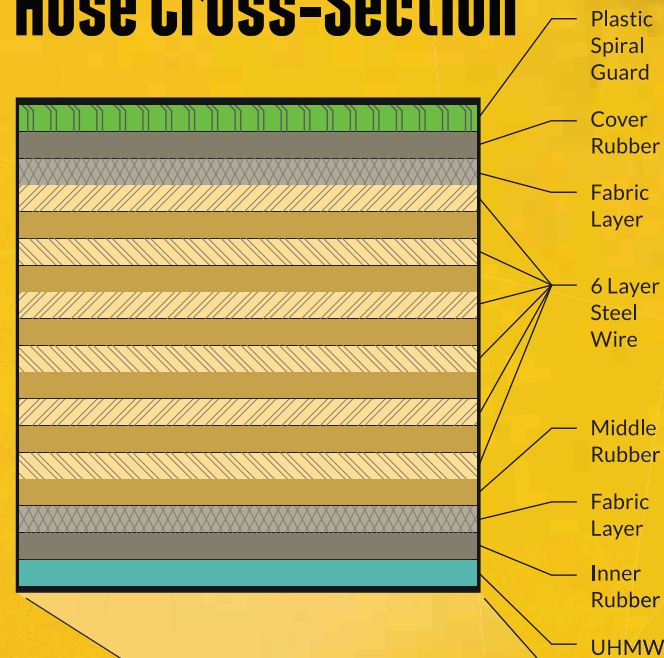

Every
Assembly Pressure
Tested To and Held
for One Hour at
22,500 PSI

- ▶ **INNER TUBE**
UHMW-PE Film + Synthetic Rubber
- ▶ **REINFORCEMENT**
6 Layers of High Strength
Spiral Steel Wire (2150 N/mm2)
- ▶ **OUTER COVER**
Abrasion and Weather Resistant
Synthetic Rubber; Poly-wrap Color
Options Available Upon Request



- ▶ **WORKING PRESSURE**
15,000 PSI
- ▶ **BURST PRESSURE**
30,000 PSI
- ▶ **COUPLED WITH 1502 UNIONS**
Grayloc and Flanges Available
by Special Order

In Stock Now!

- AH-2-15K-3MHU-3FHU-20FT
- AH-2-15K-3MHU-3MHU-20FT
- AH-2.5-15K-3MHU-3FHU-20FT
- AH-2.5-15K-3MHU-3FHU-25FT
- PA-2-15K-3MHU-3FHU-20FT-W-A801N
- PA-2-15K-3MHU-3MHU-20FT-W-A801N



DITCH THE IRON
EMBRACE THE


Flexibility

Small Bore
Frac Hose



POWERTRACK USA POWER-FRAC+ SUPER ABRASION RESISTANT FRAC HOSE

Scan QR
for Specs,
Costs,
and more...

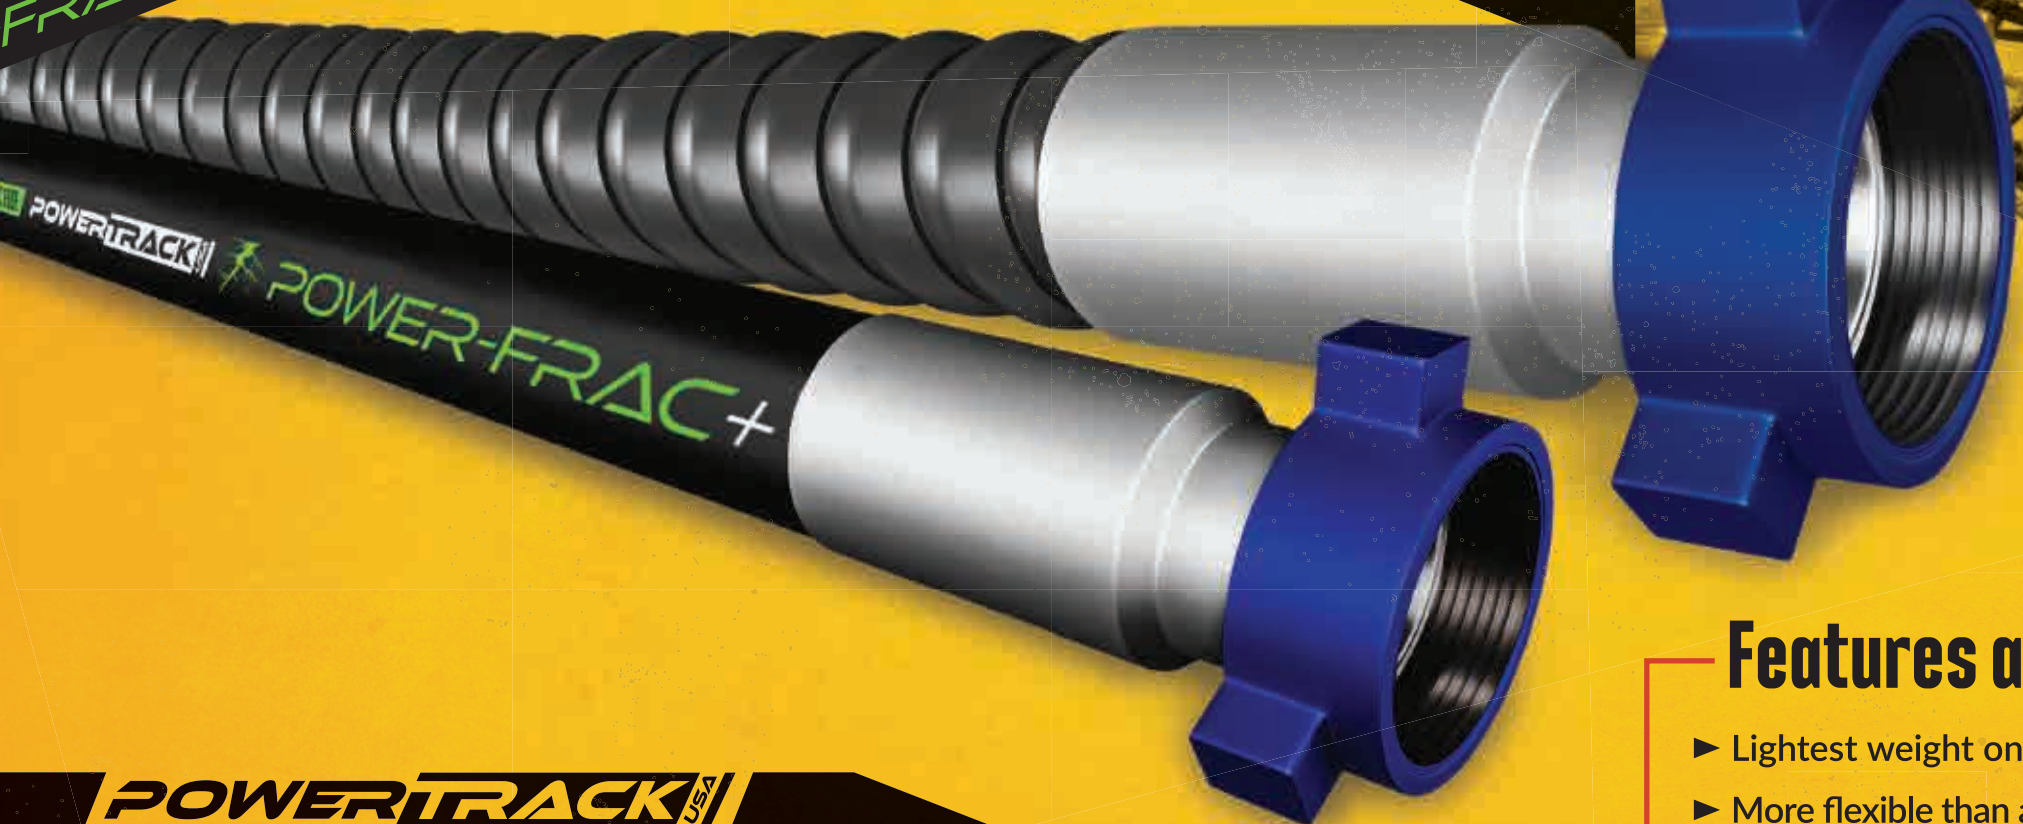

12 MONTH
WARRANTY

Features and Benefits

- ▶ Lightest weight on the market
- ▶ More flexible than anything on the market
- ▶ Reduces vibration mitigating stress fatigue
- ▶ Reduces rig up/rig down time
- ▶ Less total cost of ownership per a year
- ▶ Significantly more cost-effective compared to alternative hoses on the market
- ▶ Abrasion resistant cover allows for a longer life span
- ▶ UPE/UHMW layer superior wear resistance

POWERTRACK USA
POWER-FRAC+
SUPER ABRASION RESISTANT FRAC HOSE