











POWER-FRAC

CRIMPED FRAC HOSE


Ditch the iron and embrace the FLEXIBILITY!
 This is the lightest weight Frac hose on the market and most flexible. The abrasion resistant cover allows for a longer life span and reduced vibration mitigates stress fatigue. Compared to alternative hoses, Power-Frac is significantly cost-effective.

INNER TUBE	<i>UHMW-PE Film + Synthetic Rubber</i>
REINFORCEMENT	<i>Multiple Layers of High Strength Spiral Steel Wire (2150 N/mm²)</i>
COVER	<i>Abrasion and Weather Resistant Synthetic Rubber; Poly-wrap Color Options Available Upon Request</i>
TEMPERATURE	<i>(2"-2.5" Hose) -20°F to +212°F; (5"-6" Hose) -13°F to +212°F</i>

Part Number	 I.D. (inch)	 O.D. (inch)	 Working Pressure (PSI)	 Test Pressure (PSI)	 Burst Pressure (PSI)	 Max Flowrate (BPM/Min)	 Bend Radius (inch)	 Reinforce (Plies)	 Roll Length (feet)	 Weight (lbs/ft)
PA-2-15K-3MHU-3FHU-20FT-W-A801N PA-2-15K-3MHU-3MHU-20FT-W-A801N	1.77"	3.6"	15,000 PSI	22,500 PSI	30,000 PSI	9 BPM/Min	23.62"	6 ply	20'	8.99 lbs/ft
PA-2.5-15K-3MHU-3FHU-20FT-W-A801N	2.3"	4.8"	15,000 PSI	22,500 PSI	30,000 PSI	15.4 BPM/Min	31.5"	8 ply	20'	17.9 lbs/ft
PA-5-15K-7-1/16-FX/FLT-20FT	5"	9.33"	15,000 PSI	22,500 PSI	30,000 PSI	116 BPM/Min	96"	10 ply	20'	66.8 lbs/ft
PA-6-15K-7-1/16-FX/FLT-20FT	5.98"	10.55"	15,000 PSI	22,500 PSI	30,000PSI	140 BPM/Min	96"	12 ply	20'	87.5 lbs/ft

Special lengths up to 200' and end configurations available – **CONTACT US FOR A QUOTE TODAY!**

FITTINGS

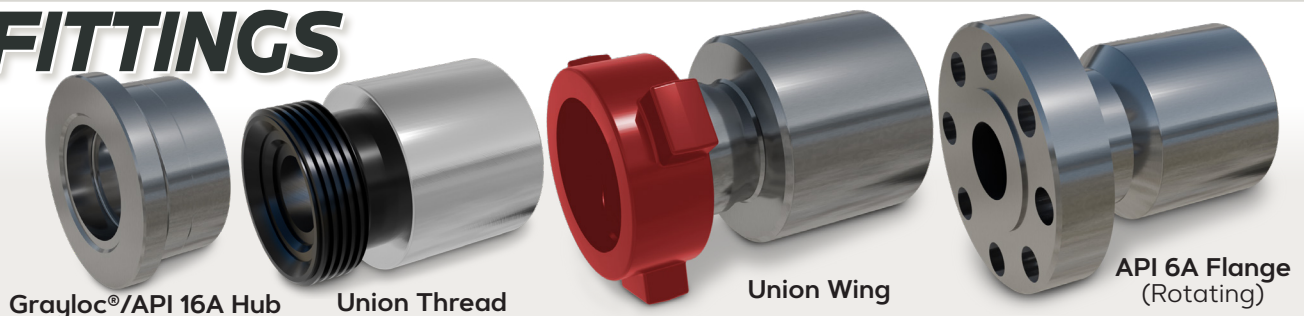

POWERTRACK^{USA}

nationalsales@powertrackhose.com