


PA-6-15K-7-1/16-FX/FLT-20FT



Hose construction: (Wrap the hose with a black PVC/PP sheath)

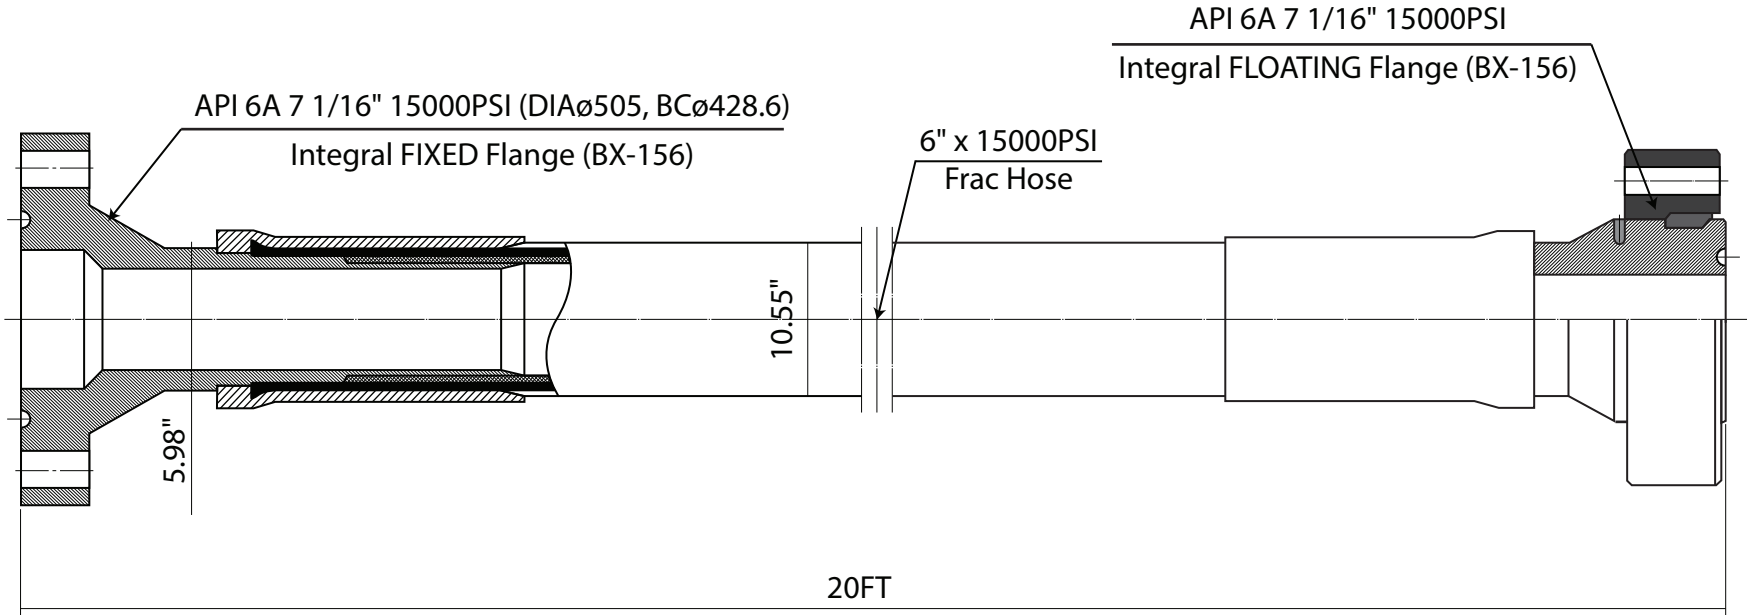

QTY: 2 Lengths

HOSE PARAMETERS	
STANDARD	FRAC HOSE
I.D.	5.98IN
O.D.	10.55IN
W.P.	15000PSI
T.R.	-13°F~+212°F
T.P.	22500PSI
B.P.	30000PSI
MBR	96IN
LBS/FT	87.5LBS/FT+1823.2LBS
VOLUME	140BBL/MIN

6"X20'		6" 15000PSI X 20FT
FX/FLT CRIMPED		
DEVON BOASE APPROVER		