

Python COMPOSITE HOSE

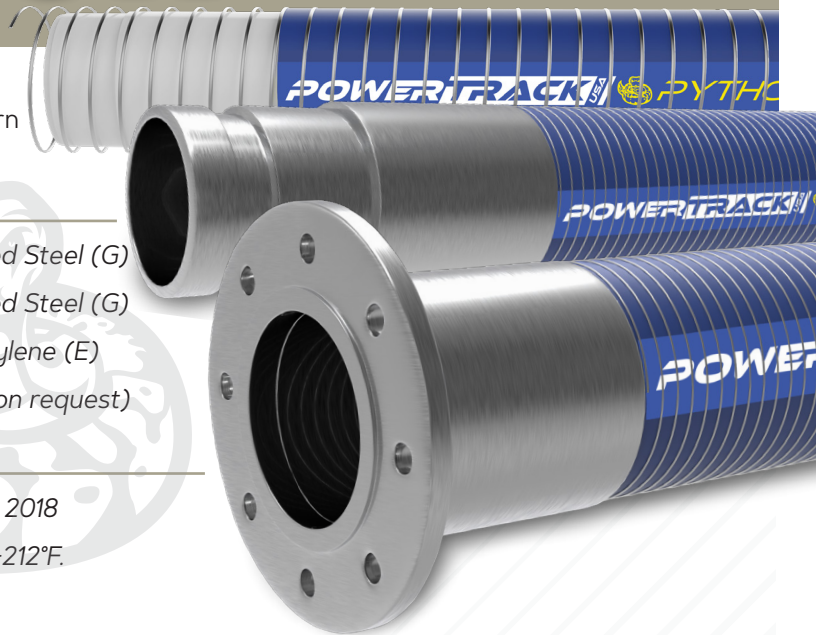
Recommended for use in delivery and/or suction of fuels, oils and lubricants in cistern trucks, railcars or fixed deposits.







CONSTRUCTION

- ▶ **INNER WIRE SPIRAL:** Galvanized Steel (G)
- ▶ **OUTER WIRE SPIRAL:** Galvanized Steel (G)
- ▶ **INNER LINING:** Polypropylene (E)
- ▶ **COVER:** PVC (PP on request)

FEATURES

- ▶ **NORMS:** EN 13765: 2018
- ▶ **TEMPERATURE RANGE:** -22°F to +212°F.
- ▶ **SAFETY FACTOR:** 4:1
- ▶ **ENDS:** Galvanized Steel 150lb Fixed x Floating or Victaulic. ANSI 150 LB RF (raised face) fixed by floating flange
- ▶ **SPECIFICATIONS:** Meets USCG 33CFR 154.500



Part Number	 I.D. (inch)	 O.D. (inch)	 Working Pressure (PSI)	 Vacuum (in/HG)	 Bend Radius (inch)	 Lbs./Ft.
PA-4-PYTHON-FIX-FLOAT-10FT	4"	5.22"	250 PSI	26 in/HG	15.75"	7 Lbs/Ft
PA-4-PYTHON-FIX-FLOAT-20FT	4"	5.22"	250 PSI	26 in/HG	15.75"	7 Lbs/Ft
PA-6-PYTHON-FIX-FLOAT-10FT	6"	7.36"	250 PSI	26 in/HG	19.56"	8 Lbs/Ft
PA-6-PYTHON-FIX-FLOAT-20FT	6"	7.36"	250 PSI	26 in/HG	19.56"	8 Lbs/Ft
PA-8-PYTHON-FIX-FLOAT-10FT	8"	9.09"	250 PSI	26 in/HG	29.13"	14.44 Lbs/Ft
PA-8-PYTHON-FIX-FLOAT-20FT	8"	9.09"	250 PSI	26 in/HG	29.13"	14.44 Lbs/Ft
PA-10-PYTHON-FIX-FLOAT-10FT	10"	11.37"	250 PSI	26 in/HG	36.22"	16.79 Lbs/Ft
PA-10-PYTHON-FIX-FLOAT-20FT	10"	11.37"	250 PSI	26 in/HG	36.22"	16.79 Lbs/Ft
PA-12-PYTHON-FIX-FLOAT-10FT	12"	13.46"	250 PSI	26 in/HG	45.27"	18.81 Lbs/Ft
PA-12-PYTHON-FIX-FLOAT-20FT	12"	13.46"	250 PSI	26 in/HG	45.27"	18.81 Lbs/Ft
PA-10-PYTHON-VIC-VIC-10FT	10"	11.37"	250 PSI	26 in/HG	36.22"	16.79 Lbs/Ft
PA-10-PYTHON-VIC-VIC-20FT	10"	11.37"	250 PSI	26 in/HG	36.22"	16.79 Lbs/Ft
PA-12-PYTHON-VIC-VIC-10FT	12"	13.46"	250 PSI	26 in/HG	45.27"	18.81 Lbs/Ft
PA-12-PYTHON-VIC-VIC-20FT	12"	13.46"	250 PSI	26 in/HG	45.27"	18.81 Lbs/Ft