


T-REX STEEL REINFORCED CONCRETE HOSE

Austin Hose's T-Rex Steel Reinforced Concrete Pumping Hose is designed for high pressure concrete pumping. It is constructed with a smooth highly abrasion resistant tube with high-tensile steel wire braided reinforcements. The cover is made with abrasion, weather, and ozone resistant SBR/EPDM synthetic rubber. The recommended operating temperature range is -30°F to +180°F.

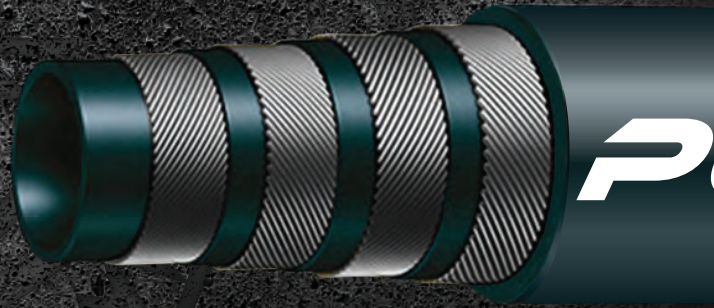

PART NUMBER	I.D. (INCH)	O.D. (INCH)	WORKING PRESSURE (PSI)	BURST PRESSURE (PSI)	PLIES OF REIN.	BEND RADIUS (INCH)	WEIGHT (LBS/FT)
AH-2-TREX	2"	2.7"	1450	2900	4	24"	1.7
AH-2.5-TREX	2-1/2"	3.4"	1450	2900	4	28"	2.5
AH-3-TREX	3"	4.0"	1450	2900	4	36"	3.4
AH-4-TREX	4"	5.0"	1450	2900	6	42"	5.7
AH-5-TREX	5"	6.1"	1450	2900	6	50"	6.5

MULTIPLE END COMBINATIONS AVAILABLE



SHOP NOW

